




Order Info:

09541

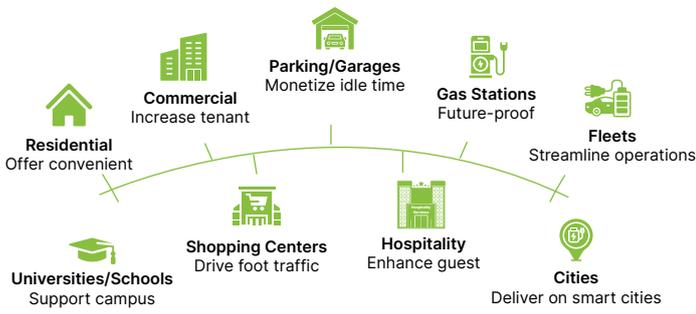

MES^{EV} EV Support System – Web/App



Desktop Friendly



Mobile App

Key Features:

1. Output – 48A : 11kW (Tunable 48-40-32)
2. Connectors – J1772
3. Display – 4.3" LCD Screen
4. Protocol – OCPP1.6
5. Enclosure Rating – NEMA Enclosure Type 4
6. Cable Length – 16 FT
7. Payment Method – RFID, QR, APP



Technical Specifications

Output Current

32A - 40A - 48A

Input Voltage

208 - 240V | 50~60Hz

Output Cable & Connectors

16 FT

1*J1772 (Standard), NACS (Optional)

Environment

Operating Temperature

-30~55°C (-22°F~131°F)

Humidity

≤95%

IP/IK ratings

NEMA 4, IK08

Storage Temperature

-30 ~ 70°C (-22°F~158°F)

Regulation

Safety Regulations

ETL (UL2231,UL2594,UL1998,UL991)

Metering & Billing

N/A

Energy Efficiency

Energy Star

Wireless Certificate

FCC, IC

Product Power

6KW - 11.5KW

Power Wiring

Three Lines - L1, L2, PE

Mechanical

Dimension (HXWXD)

15.02" x 9.50" x 4.13"

Weight

7 KG

Installation Method

Wall-Mounted / Floor Standing - Optional

Number of Interfaces

1

Housing Material

PC and ABS mixed material

Protection

CCID20 | Short Circuit Protection

Over Voltage Protection | Ground Protection

Under Voltage Protection | Over-Temp Protection

Over-Current Protection | Surge Protection : 6 kV @ 3,000A

Over Load Protection | Fault Self-Test

Contact Us:

 (214)-571-6374

 sales@maverickled.com

 www.maverickled.com



1111 N DUPage Ave
Lombard, IL 60148