




Order Info:

5 Wire
48A: 09562-01
80A: 09563-01

3 Wire
48A: 09562-02
80A: 09563-02

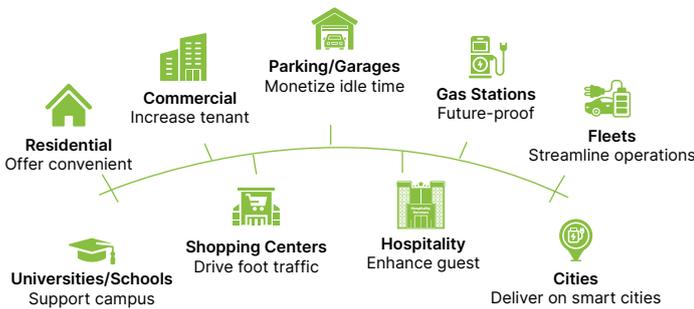

MES^{EV} EV Support System – Web/App



Desktop Friendly



Mobile App

Key Features:

1. Output – 2*48A : 11.5kW | 2*80A : 19.2kW
2. Connectors – J1772, NACS (Optional)
3. Display – 7" LCD Screen
4. Protocol – OCPP 1.6J/2.0.1
5. Enclosure Rating – NEMA Enclosure Type 4
6. Cable Length – 18 FT
7. Certification – CTEP/NTEP (Optional)
8. Compatibility – ISO15118 (Optional)
9. Payment Method – RFID, QR, APP (Optional: Credit Card)



Technical Specifications

Output Current

2*48A Max | 2*80A Max

Input Voltage

208 - 240V | 60Hz

Output Cable & Connectors

2*18FT (2*25FT Optional)
J1772 (Standard), NACS (Optional)

Environment

Operating Temperature
-22°F to 122°F (-30 ~ 50°C)

Humidity
Up to 95%, Non-Condensing

IP/IK ratings
NEMA Enclosure Type 4, IK08

Storage Temperature
-40°F to 167°F (-40 ~ 75°C)

Altitude
≤2000m

Cooling Method
Natural Cooling

Regulation

Safety Regulations
ETL (UL2231,UL2594,UL1998,UL991)

Metering & Billing
CTEP/NTEP (Optional), ISO15118 (Optional)

Energy Efficiency
Energy Star

Wireless Certificate
FCC, IC

Product Power

2*11.5kW | 2*19.2kW

Power Wiring

5 Wire: L1/L2/PE/L2/L1
3 Wire: L1/L2/PE

Mechanical

Dimension (W x D x H)
17.7in x 11.8in x 6.4in

Weight
22 - 23 lbs

Protection

Over Voltage Protection | Ground Protection

Under Voltage Protection | Over-Temp Protection

Over-Current Protection | Surge Protection : 6 kV @ 3,000A

Contact Us:

 (214)-571-6374

 sales@maverickled.com

 www.maverickled.com

 1111 N DUPage Ave
Lombard, IL 60148